



Midea MHELIOS Home Energy Storage System (Three-Phase)



About Midea

Midea Group is a Fortune 500 company, with robust business growth across multiple sectors. We believe in humanizing-technology and provide customized solutions for smart home appliances, electro-mechanical, building technologies, robotic&automation and digital innovation.

#278

2023 Fortune Global 500

#199

2023 Forbes Global 2000

#36

Brand Finance 2022 Top 100 Most Valuable Tech Brands 200+

Countries & Regions of Operation

S&P/Moody's/Fitch Credit Ratings

A/A3/A 160,000+

Employees

R&D centers in 12 countries all around the world

Production centers in 14 countries all around the world



Midea MHELIOS Home Energy Manager M1-T10 K



Intelligent management

• High self-consumption with optimized built-in energy management function

Flexible application


 Meet multi-scenarios: PV installation only , MESU added and battery extension capability

Sector coupling

 Plug & play dry contact and Modbus interface for ready heat pump control

Easy to maintenance

 Free online monitoring, All information about PV system is available anytimeand anywhere.

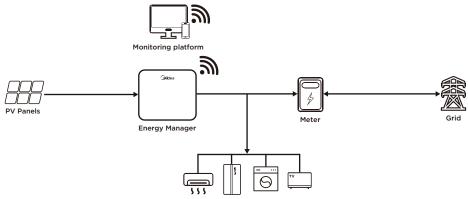

Inverter Model	M1-T10 K
Input (PV)	
Recommended max. PV power	15000 Wp
Max. input voltage	1000 V
MPPT operating voltage range	160V-800 V
Max. input current per MPPT	14 A
Number of MPP trackers	2
Input (Battery)	
Compatible Battery	Midea Energy Storage Unit
Operating voltage range	600-980 V
Max. charge/discharge power	10000 W
Output	
Grid connection	Three phase
Max. Apparent Power	11000 VA
Rated output voltage	220 V / 380 V, 230 V / 400 V, 3 W / N+PE
General	
Ingress protection	IP65
Dimension(W/H/D, mm) & Weight	521x516x196 mm,33.6 kg
Efficiency	
Max. efficiency	98%
Standard Compliance	
EMC	EN 61000-6-1,EN 61000-6-3,EN 62920
Safety	IEC62109-1, IEC62109-2
Grid	EN 50549-1, VDE-AR-N 4105, CEI 0-21,G99, UTE C15-712-1, UNE 217002 ,TR321,TR322,C10/11
Warranty	
Warranty	10 years

^{*}All specifications are subject to change without notice.



Midea MHELIOS Home Energy Storage System M1-T10 K H1-(5-40)-E0



Higher production

 More energy using DC coupled solution architecture that stores PV power directly to the battery without AC conversion losses

Intelligent management


 Integrated features (back-up power, energy management function, etc.) maximize cost savings

Safe and reliable

 Highest Safety Standards VDE 2510-50, Lithium Iron Phosphate (LFP) Cell

Flexible application

 Modular design for easy installation and transportation, up to 40kWh

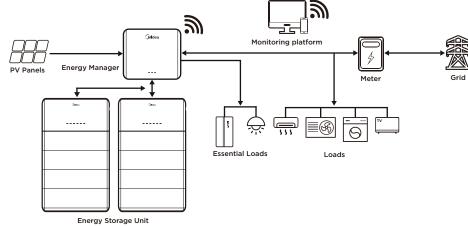

Inverter Model	M1-T10 K
PV Input	
Recommended max. PV power	15000 Wp
Max. input voltage	1000 V
Max. input voltage range	160-800 V
Max. input current per MPPT	14 A
Number of MPPT	2
Output	
Max. apparent power(Grid)	11000VA
Max. apparent power(Backup)	11000VA
Rated output voltage	220 V / 380 V, 230 V / 400 V, 3 W / N+PE
Battery Model	H1-(5-40)-E0
Battery pack capacity	5 kWh, 48 V
Power module rated power	5 kW
Operating voltage range	600-980 V
Max. usable energy	40 kWh
Max. charge/discharge power	10 kW
Cell technology	LiFePO ₄
Standard Compliance	
Inverter	EN 61000-6-1/3,EN 62920, IEC62109-1/2, EN 50549-1, VDE-AR-N 4105, CEI 0-21,G99,UTE C15-712-1, UNE 217002 ,TR321,TR322,C10/11
Battery	IEC/EN 62109-1, IEC/EN 62477, VDE 2510-50, EN 61000-6-1, EN 61000-6-3, IEC62619, UN38.3, IEC/EN 62040-1
Warranty	
Inverter	10 years
Battery	10 years

^{*}All specifications are subject to change without notice.

MHELISS





All-In-One Green Smart Home Solution

Smart control helps you live a smart, green lifestyle







infomess@midea.com

https://www.midea.com/global/mhelios